


歐洲進口：隱藏式（管狀馬達）及·捲門·窗簾·陽棚等裝潢建材

# 時代麗 Study

## 電動減速馬達專用機 ELECTRIC RETARDING MOTOR

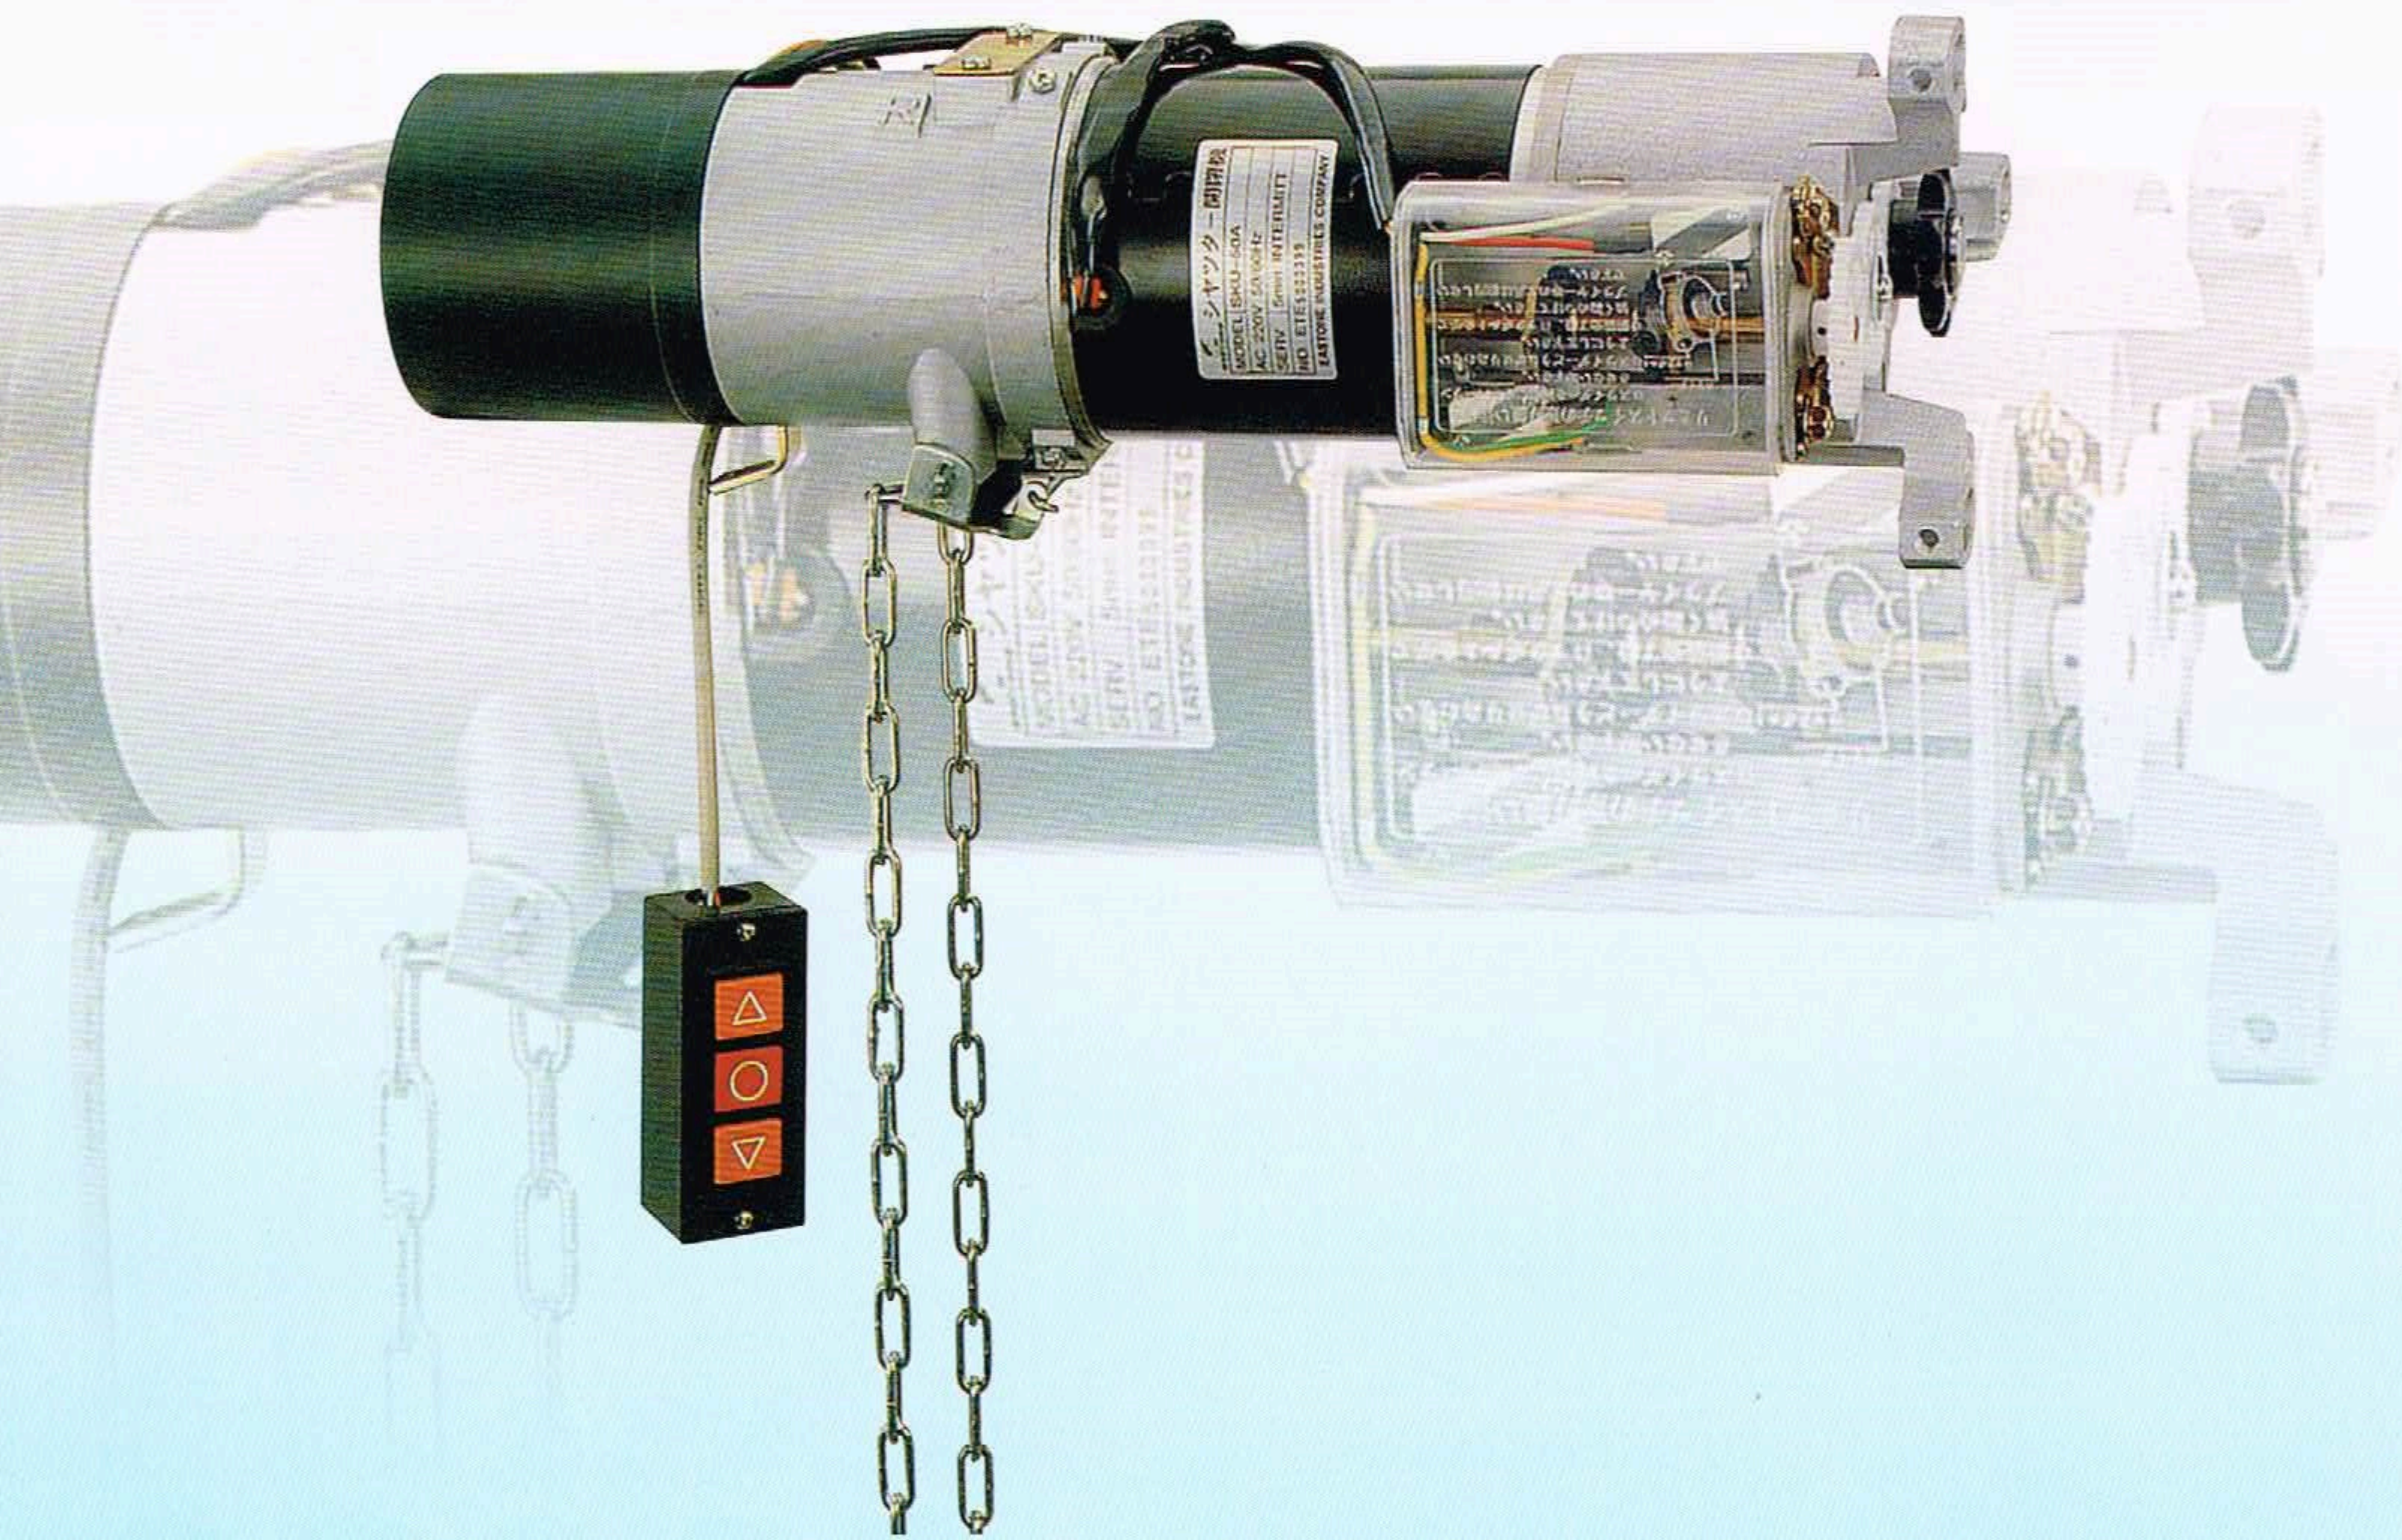

**服務第一**  
BEST SERVICE

**品質第一**  
TOP QUALITY

**技術第一**  
HIGH TECHNIC



代理商／經銷商  
Agents & Distributors wanted

組合屋·玻璃屋·圍籬·鋁合金捲門·抗熱景觀捲簾布·遮陽雨棚·門窗室外隔等建材

# 電動減速馬達專用機

## ELECTRIC RETARDING MOTOR



SUK-30A




SUK-40A




SUK-50A




SUK-70A

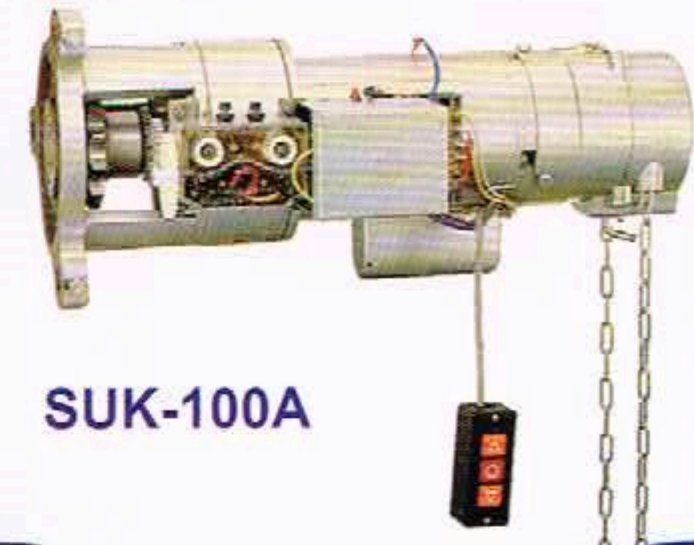


SUK-100A

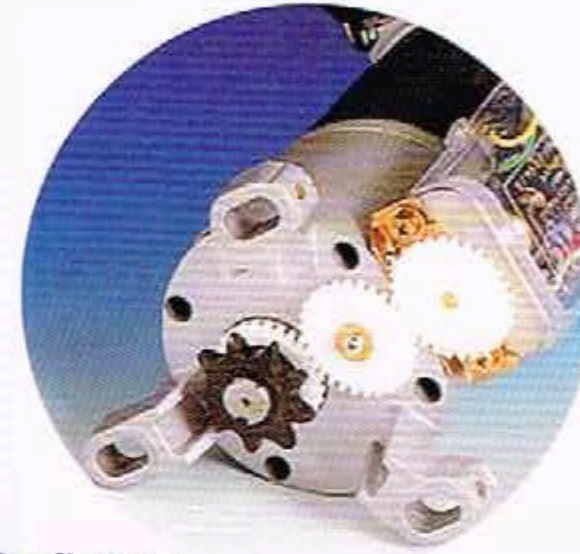

鍊條式(SL)  
(架板及鍊條自行組合)  
Chain-type(SL)  
(Bracket & Chain Self-assembled)

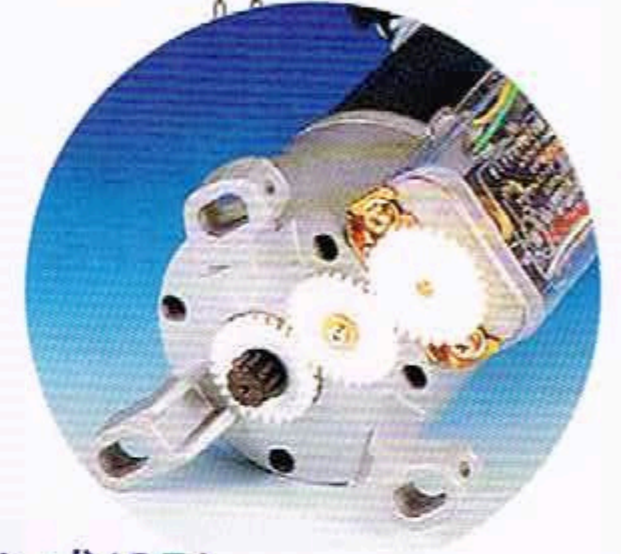

插心式(SP)  
(鍊條及齒輪已組裝完成)  
Slot-type(SP)  
(Chain & Gear Assembled)

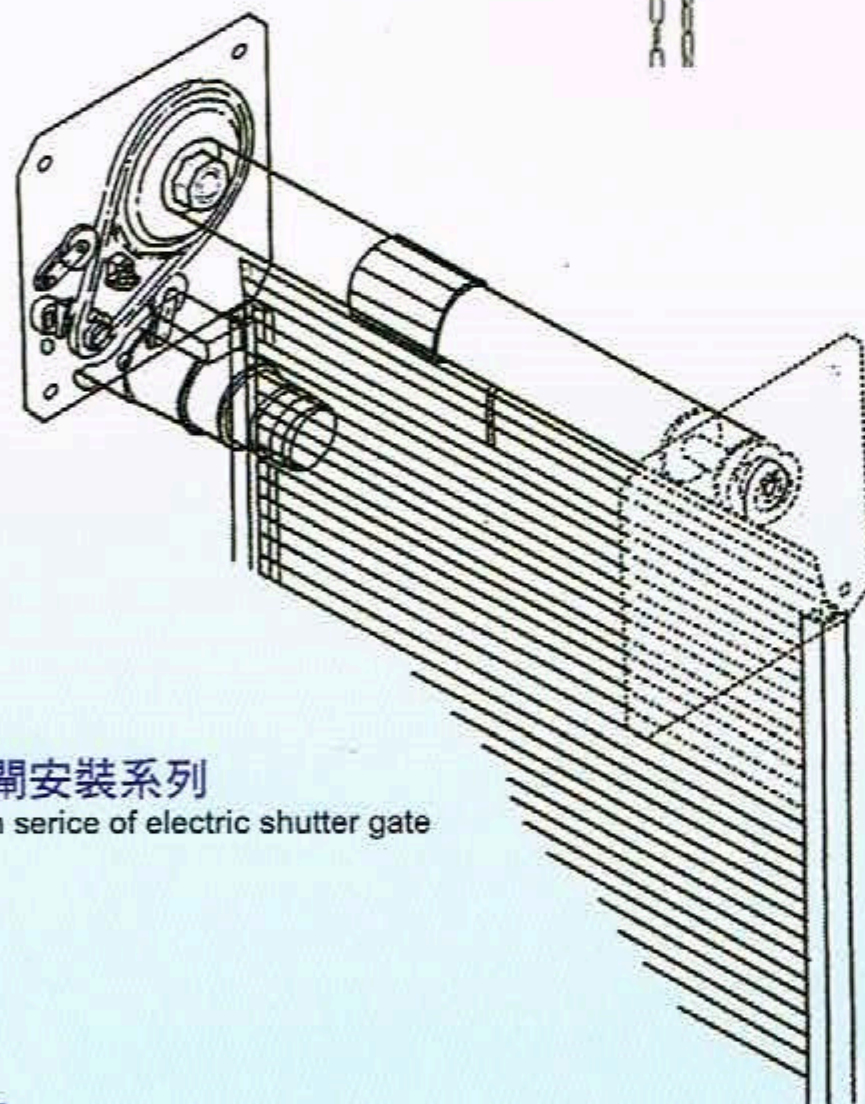

電動卷閘安裝系列  
Installation series of electric shutter gate

減速馬達捲門專門機性能規格表  
ELECTRIC RETARDING MOTOR SPECIFICATION

機型 item	電壓 voltage	捲揚能量 lifting power			馬達 motor		鏈條 chain	最大捲高 max lifting height	機重 equipment weight
		重量 weight	捲門板 sgft	管 shaft	輸出功率 output power	轉速 R.P.M.			
鍊條式(SL) suk-30A 插心式(SP) suk-30A	1 φ 220V / 230V 3 φ 400V / 415V	300 kg	約150才 about 150ft'	4"	150	1720	# 50	6M	12kg
鍊條式(SL) suk-40A 插心式(SP) suk-40A	1 φ 220V / 230V 3 φ 400V / 415V	400 kg	約200才 about 200ft'	4"	210	1720	# 50	6M	12.5 kg
鍊條式(SL) suk-50A 插心式(SP) suk-50A	1 φ 220V / 230V 3 φ 400V / 415V	500 kg	約250才 about 250ft'	4"	310	1720	# 50	6M	15kg
鍊條式(SL) suk-70A	1 φ 220V / 230V 3 φ 400V / 415V	700 kg	約350才 about 350ft'	5"	350	1720	# 60	6M	17kg
鍊條式(SL) suk-100A	1 φ 220V / 230V 3 φ 400V / 415V	1000 kg	約500才 about 500ft'	5"	750	1720	# 80	6M	40kg

※ 特殊規格歡迎訂購 Custom made specification welcome

架板規格及外表尺寸  
BRACKET SPECIFICATION AND MEASURE

捲門馬達與架板對照表 rolling door motor/bracket specification				捲門與門片配合後之最高尺寸單位 (mm) height limit for rolling door with door sheet (mm)					
規格 specification	suk-30A suk-40A suk-50A suk-70A	suk-30A suk-40A suk-50A	suk-70A	4"	5"	6"	5"	6"	8"
	架板高 bracket height (mm)	架板寬 bracket width (mm)	架板寬 bracket width (mm)	75	75	75	100	100	100
1.1尺 1.1 ft	333.3	490	—	3000	2800	2100	1800	1800	
1.2尺 1.2 ft	363.6	505	—	3600	3600	3100	2600	2500	1900
1.3尺 1.3 ft	393.9	520	570	5000	4800	4000	3400	3200	2500
1.4尺 1.4 ft	424.2	570	585	6000	5900	5200	4200	4000	2900
1.5尺 1.5 ft	454.5	585	620	7000	6500	6500	5000	5000	4000
1.6尺 1.6 ft	484.8	620	650	8000	7800	7200	6000	5600	4600

門片素材加工前後規格重量表 (厚度1.0單位mm) 為基準  
DOOR SHEET BEFORE-AFTER PRESSING WEIGHT TABLE (BASED ON THICKNESS 1.0 mm)

加工前 料寬 material width before pressing (mm)	加工後 料寬 material width after pressing (mm)	台尺規格 imperial unit 單支1尺長重量 weight per feet	台尺規格 imperial unit 每才重量 weight per ft <sup>2</sup>	公尺規格 metric unit 單支1公尺長重量 weight per meter	公尺規格 metric unit 1公尺平方(m <sup>2</sup> )重量 weight per m <sup>2</sup>
122	75	0.290 kg	1.160 kg	0.958 kg	12.773 kg
136	75	0.323 kg	1.294 kg	1.068 kg	14.239 kg
174	100	0.414 kg	1.242 kg	1.366 kg	13.669 kg
186	100	0.442 kg	1.328 kg	1.461 kg	14.612 kg

備註：本表素材厚度以1.0mm為準  
例如：您買實際素材厚度為1.2mm而其平方台尺重量為1.294kgx1.2mm=1.553kg  
以此類推 (本表平方台尺重量x實際素材厚度=需求重量)  
Figures in table are on 1.0mm thickness  
If the actual thickness is 1.2mm, the weight per ft<sup>2</sup> is 1.294kgx1.2mm=1.553kg  
(weight per ft<sup>2</sup> x material thickness = total weight)

## 捲門機及配件 Rolling Door Accessories

